MICROCOPY RESOLUTION TEST CHART

ⅮARDS-1963-A

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION	1b. RESTRICTIVE MARKINGS
Unclassified	

2a. SECURITY CLASSIFICATION AUTHORITY	3. DISTRIBUTION AVAILABILITY OF REP.
	Approved for public release; distribution is unlimited
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE	

4. PERFORMING ORGANIZATION REPORT NUMBER	5. MONITORING ORGANIZATION REPORT #
FPO-1-77(29)	

6a. NAME OF PERFORM. ORG. 6b. OFFICE SYM	7a. NAME OF MONITORING ORGANIZATION
Ocean Engineering & Construction Project Office CHESNAVFACENGCOM	

6c. ADDRESS (City, State, and Zip Code)	7b. ADDRESS (City, State, and Zip)
BLDG. 212, Washington Navy Yard Washington, D.C. 20374-2121	

8a. NAME OF FUNDING ORG. 8b. OFFICE SYM	9. PROCUREMENT INSTRUMENT INDENT #

8c. ADDRESS (City, State & Zip)	10. SOURCE OF FUNDING NUMBERS			
	PROGRAM ELEMENT #	PROJECT #	TASK #	WORK UNIT ACCESS #

11. TITLE (Including Security Classification)
Preliminary Analysis of Near-Field and Far-Field Arrays for Project Linear Chair

12. PERSONAL AUTHOR(S)

13a. TYPE OF REPORT	13b. TIME COVERED		14. DATE OF REP. (YYMMDD)	15. PAGES
	FROM	TO	77-09	51

16. SUPPLEMENTARY NOTATION

17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if nec.)
FIELD	GROUP	SUB-GROUP	Linear Chair, Dynamic analysis, Arrays,

19. ABSTRACT (Continue on reverse if necessary & identify by block number)
Project Linear Chair is examining methods of measuring the near field and far field magnetic, electric, and electro-magnetic signatures of various underwater platforms. Initial hydro-mechanical mooring approaches which have been proposed to position the sensor strings are depicted in Figure 1-1 for (Con't)

20. DISTRIBUTION/AVAILABILITY OF ABSTRACT	21. ABSTRACT SECURITY CLASSIFICATION
SAME AS RPT.	

22a. NAME OF RESPONSIBLE INDIVIDUAL	22b. TELEPHONE	22c. OFFICE SYMBOL
Jacqueline B. Riley	202-433-3881	

DD FORM 1473, 84MAR	SECURITY CLASSIFICATION OF THIS PAGE

BLOCK 19 (Con't)

the near field system and Figure 1-2 for the far field system.

A stringent requirement of any proposed mooring system is the movement of the attached sensors in response to ocean currents. A sensor watch circle of 3 ft. radius is a desired goal to achieve.

PRELIMINARY ANALYSIS OF

NEAR-FIELD AND FAR-FIELD ARRAYS

FOR PROJECT LINEAR CHAIR

PREPARED FOR
OCEAN ENGINEERING AND CONSTRUCTION PROJECT OFFICE
CHESAPEAKE DIVISION
NAVAL FACILITIES ENGINEERING COMMAND
WASHINGTON, D.C. 20374

TABLE OF CONTENTS

LIST OF ILLUSTRATIONS

LIST OF TABLES

Section 1

INTRODUCTION

1.1 LINEAR CHAIR REQUIREMENTS

Project Linear Chair is examining methods of measuring the near field and far field magnetic, electric, and electro-magnetic signatures of various underwater platforms. Initial hydro-mechanical mooring approaches which have been proposed to position the sensor strings are depicted in Figure 1-1 for the near field system and Figure 1-2 for the far field system.

A stringent requirement of any proposed mooring system is the movement of the attached sensors in response to ocean currents. A sensor watch circle of 3 ft. radius is a desired goal to achieve.

1.2 OVERVIEW OF REPORT

The following report contains analysis methods for determining the static deflections that could be expected from the mooring configurations depicted in Figures 1-1 and 1-2. The analysis methods have been exercised for various parametric combinations of system components to obtain an initial range of excursions that could be expected under different current conditions. It is emphasized that these initial results are primarily presented for illustrative purposes since gross assumptions were made concerning the size and weight of system components. However, as the specific designs are evolved, the analysis techniques presented herein can serve as a valuable design tool to assess the hydro-mechanical performance to be expected.

Section 2 addresses the near field array analysis and Section 3 addresses the far field (goal post) array analysis. Appendices have been used liberally to present detailed mathematical formulations and descriptions for those readers who are interested.

1-1

GOAL POST ARRAY

TRI-MOOR ARRAY

WATER DEPTH (FT)

200

350

1600

3000
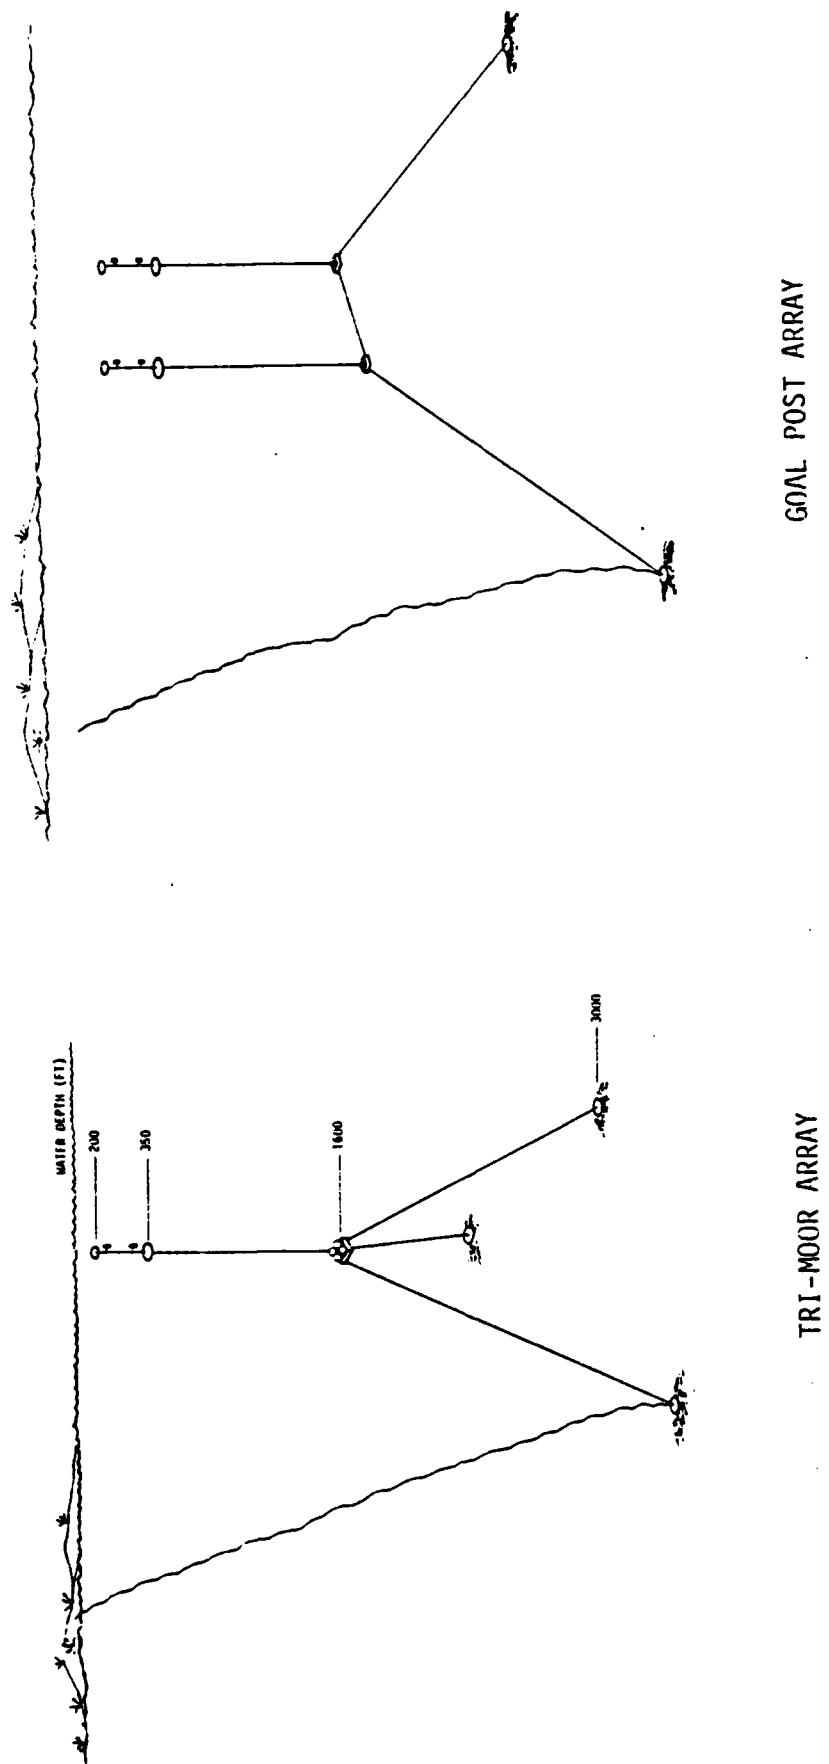
Figure 1-1. Candidate Mooring Configurations for the Near-Field Array System
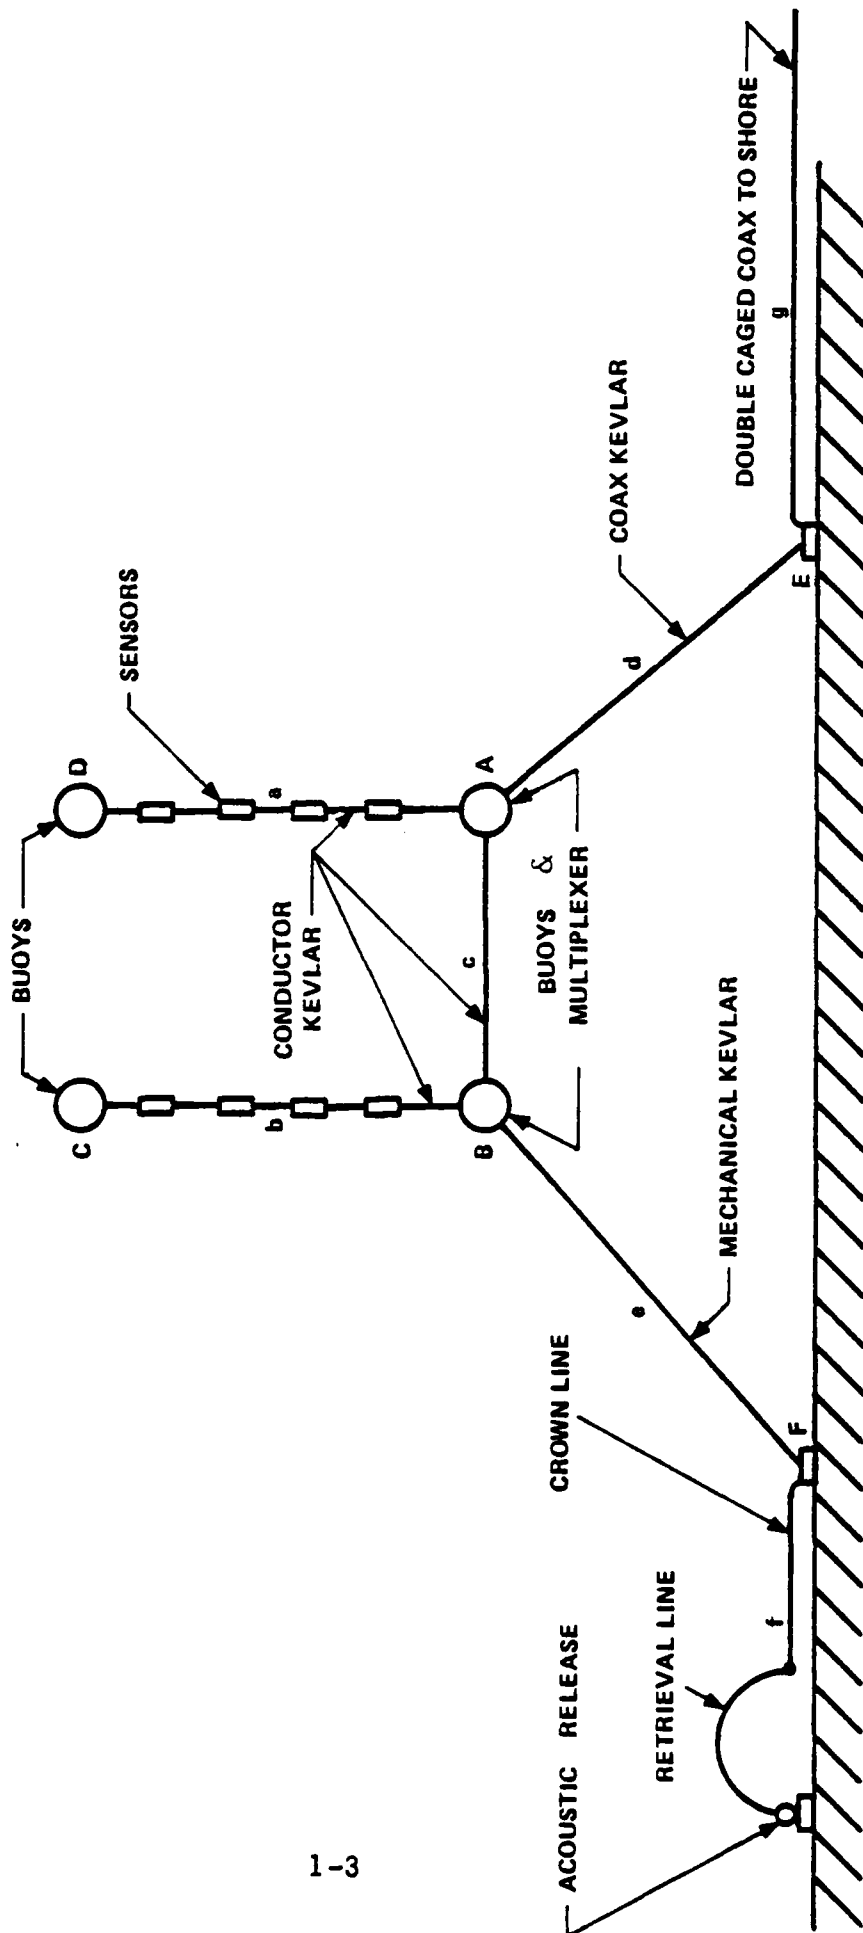
Figure 1-2. Candidate Mooring Configuration for the Far-Field Array System

Section 2

NEAR-FIELD ARRAY ANALYSIS

2.1   CONFIGURATION DISCUSSION

The proposed near field array consists of two independent sensor strings separated by approximately 180 ft.   Table 2-1 contains the pertinent parameters examined in this analysis.

Table 2-1. Configuration Parameters for Near-Field Array Analysis

Water Depth	3000 ft.
Cable Parameters	
Construction	Kevlar
Diameters	0.3, 0.5, and 1.0 inches
Overall length	2600 ft.
Buoyed length	1000 ft.
Wt/ft. (water)	0 (neutrally buoyant)
Buoy Parameters	
Material	Aluminum 6061-T6
Net Buoyancies	500, 1000, 3000, 5000 lbs. with
Diameters	of 3.02, 3.80, 5.49, 6.51 ft. respectfully
Shape	Spherical
Drag Coefficient	0.5 based on frontal area
Currents	
Type	Uniform for entire depth
Magnitude	0.05, 0.1, 0.3, 0.5, and 1.0 kts.

The buoy parameters were calculated based on a 3000 ft. design depth and a safety factor of 3.   Detailed calculations of the buoy parameters are contained in Appendix A.

The configurations analyzed were of two types and are depicted in Figures 2-1 and 2-2.   In the two-buoy configurations the size of the buoy at the top and intermediate positions were sequentially changed.   The resultant

2-1

Top buoys with net buoyancies of 500, 1000, 3000 and 5000 pounds
Diameters of 3.02, 3.80, 5.49 and 6.51 feet

Direction of Integration

Intermediate buoy with Net Buoyancies of 500, 1000, 3000 and 5000 pounds diameters of 3.02, 3.80, 5.49 and 6.51 feet

400 ft

1000 ft

1600 ft

Uniform Currents of 0.05, 0.1, 0.3, 0.5 and 1.0 knots.

Water Depth of 3000 feet
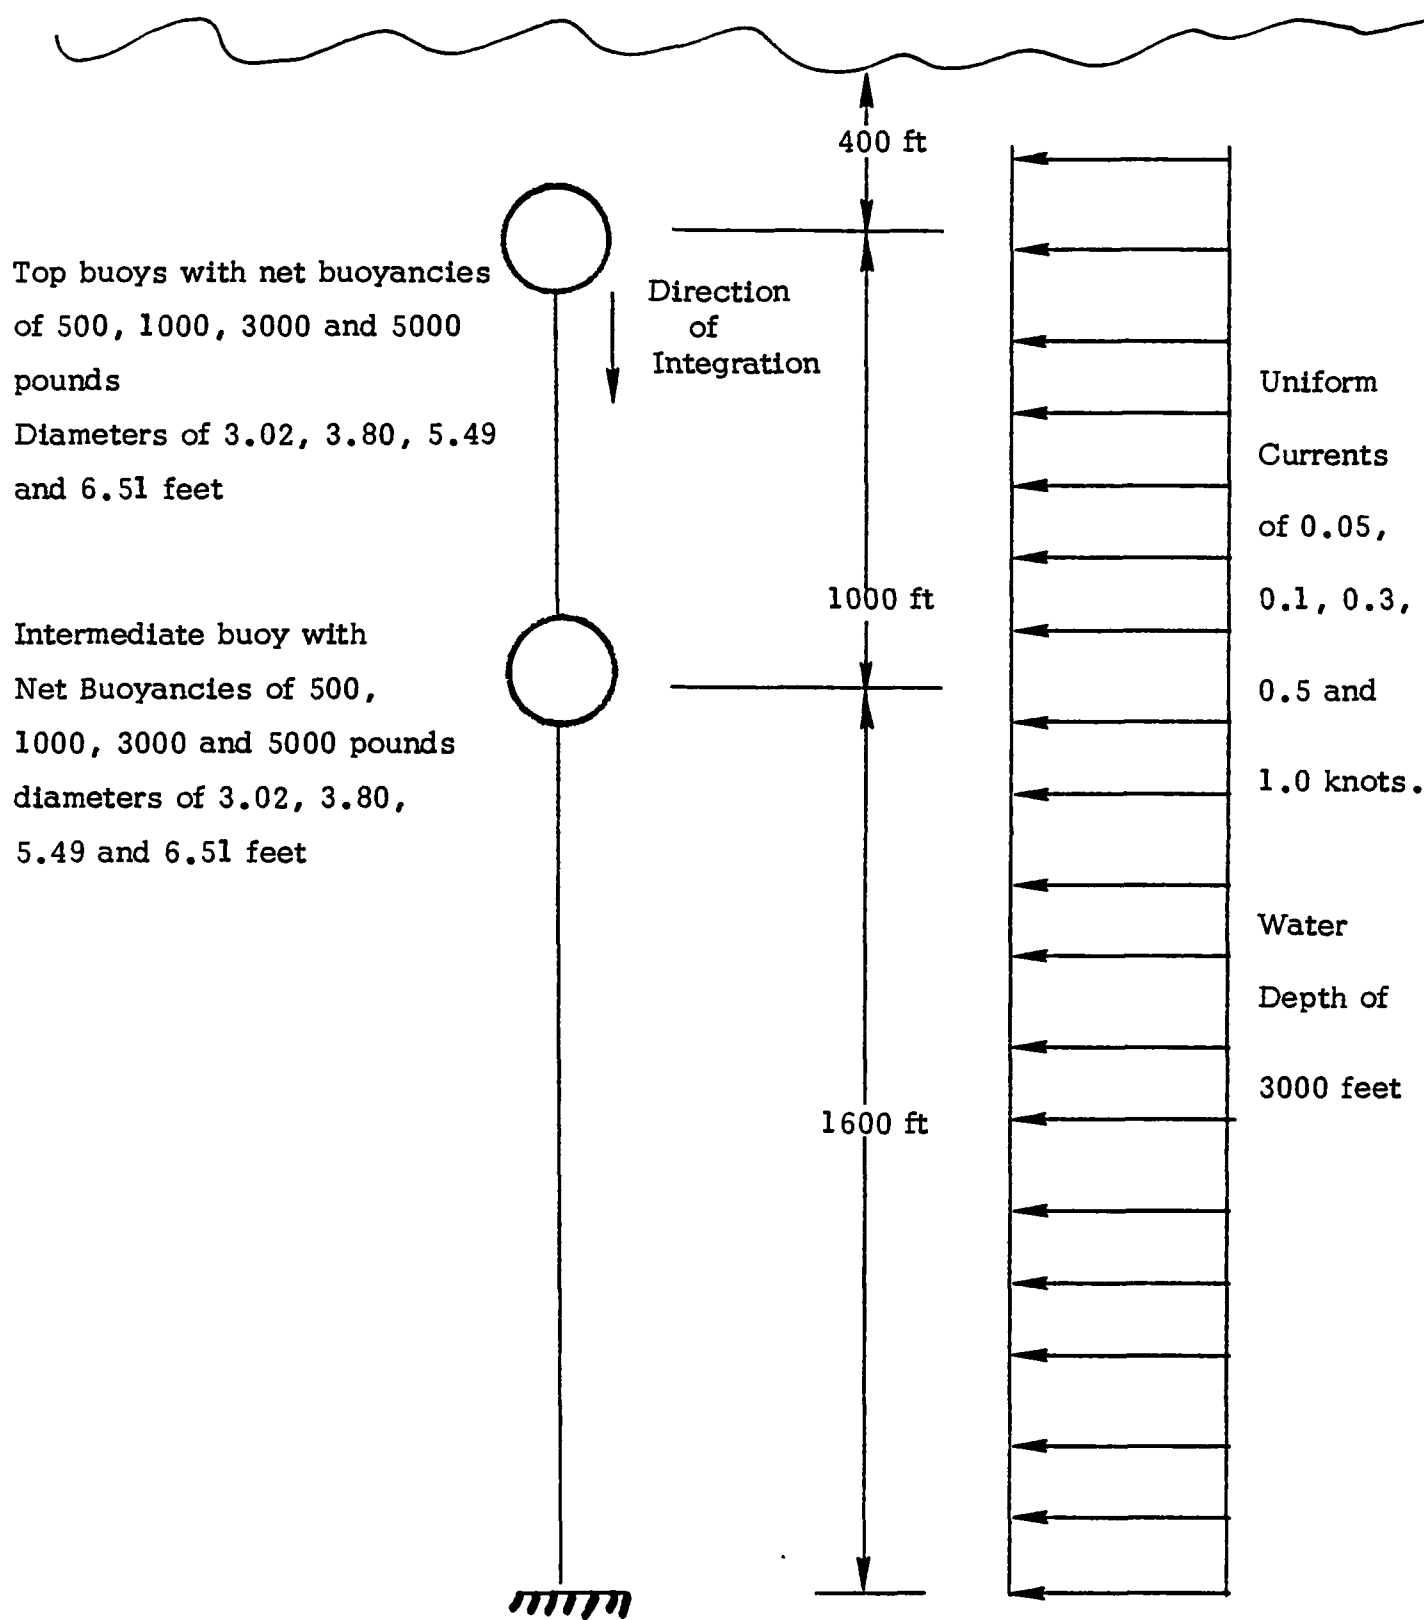
Figure 2-1. Two-Buoy Near-Field Array Analysis Diagram

2-2

Figure 2-2. Distributed Buoy Near-Field Array Analysis Diagram

All buoys have 500 pounds
Net Buoyancy with 3.02 foot
diameter

0.5 inch Smooth Neutrally
Buoyant Kevlar Cable

400 ft

1000 ft

1600 ft

Uniform
Currents
of 0.5
and 0.3
knots

Water
Depth
of
3000 feet

2-3

configurations were then analyzed in uniform currents of 0.05, 0.1, 0.3, 0.5, and 1.0 knots. In the distributed buoy configuration 11 500-lb. buoys were uniformly spaced over the 1000-ft. buoyed length. This configuration was analyzed in currents of 0.3 and 0.5 knots.

2.2   RESULTS OF TWO-BUOY CONFIGURATION

Tables 2-2 thru 2-5 contain the computed watch circle radii for the top and intermediate buoy under different configurations and currents. The tables are for net buoyancies of 500, 1000, 3000, and 5000 lb at the top, respectfully.

The combinations that satisfy the initial watch circle radius of 3 ft. for the top buoy are delineated by the red line in the tables.

2.3   RESULTS OF DISTRIBUTED BUOY CONFIGURATION

In addition to examining a two buoy approach, uniformly distributed loading of the top 1000 feet of the cable was also investigated. The following parameters were used:

Cable

Diameter	0.5 inch
Wt/ft. (water)	0 (neutrally buoyant)

Buoy

Net Buoyancy	500 lbs.
Diameter	3.02 ft.
Number	11 buoys uniformly spaced over top 1000 ft. scope.

Current

Type	Uniform
Magnitude	0.3, 0.5 knots.

The intent of examining the uniformly spaced buoyancy was to obtain tradeoffs in watch circle performance for distributed versus concentrated buoyancy elements in a uniform current. The cases compared are depicted graphically in Figure 2-3. The composite net buoyancy in each system

2-4

Table 2-2. Watch Circle Radii (Feet) with 500 Pounds Net Buoyancy at the Top For Various Intermediate Position Buoyancies and Currents

CURRENT KNOTS	CABLE DIAMETER INCHES	INTERMEDIATE NET BUOYANCY							
		500 lb		1000 lb		3000 lb		5000 lb	
		TOP BUOY	INT BUOY	TOP BUOY	INT BUOY	TOP BUOY	INT BUOY	TOP BUOY	INT BUOY
.05	.3	1.04	.81	0.78	0.55	.47	0.24	.40	0.17
	.5	1.43	1.20	1.04	0.58	0.58	0.35	0.47	0.24
	1.0	2.40	2.17	1.69	1.46	0.86	0.63	0.65	0.42
.1	.3	2.23	2.02	2.05	1.84	1.02	0.81	0.80	0.59
	.5	3.37	3.16	2.38	2.17	1.46	1.25	1.08	0.87
	1.0	6.21	6.00	4.27	4.26	1.97	1.76	1.79	1.58
.3	.3	30.43	23.81	19.70	13.12	12.30	5.68	10.91	4.29
	.5	54.71	41.66	39.20	26.15	21.65	18.60	19.20	6.15
	1.0	115.79	86.84	85.27	56.32	49.85	20.90	39.73	10.78
.5	.3	103.90	76.99	77.34	50.43	45.50	18.59	38.81	16.10
	.5	171.86	127.39	28.74	84.27	76.59	32.12	65.09	20.62
	1.0	340.19	251.86	256.26	167.93	156.51	68.18	131.38	43.05
1.0	.3	444.07	323.55	341.78	221.26	213.74	93.22	184.54	64.02
	.5	691.47	503.90	535.32	347.75	336.08	148.51	286.82	99.25
	1.0	1182.49	847.90	948.06	613.57	606.99	272.60	512.61	178.22

Table 2-3. Watch Circle Radii with 1000 Pounds Net Buoyancy at the Top for Various Intermediate Position Buoyancies and Uniform Currents

CURRENT KNOTS	CABLE DIAMETER INCHES	INTERMEDIATE NET BUOYANCY							
		500 lb		1000 lb		3000 lb		5000 lb	
		TOP BUOY	INT BUOY	TOP BUOY	INT BUOY	TOP BUOY	INT BUOY	TOP BUOY	INT BUOY
.05	.3	.50	.46	.40	.36	.22	.18	.18	.14
	.5	.76	.72	.59	.55	.32	.28	.24	.20
	1.0	1.41	1.37	1.08	1.04	.57	.53	.41	.37
.1	.3	2.00	1.84	1.59	1.43	.90	.74	.72	.56
	.5	2.34	2.18	2.37	2.21	1.29	1.13	.98	.82
	1.0	4.23	4.07	3.26	3.10	2.26	2.10	1.63	1.47
.3	.3	14.55	13.09	11.45	9.99	6.64	5.18	5.54	4.08
	.5	31.36	26.16	23.77	18.57	12.94	7.74	10.98	5.78
	1.0	69.04	56.36	53.73	41.05	30.26	17.50	22.71	10.03
.5	.3	63.25	50.47	49.95	37.17	28.13	15.35	24.10	11.32
	.5	105.88	84.38	84.31	62.81	49.95	28.45	40.00	18.50
	1.0	211.88	168.45	169.15	125.72	103.46	60.03	82.92	39.49
1.0	.3	286.52	222.19	231.47	170.14	148.01	83.68	124.50	60.17
	.5	450.91	351.69	368.13	269.68	232.87	133.65	192.90	93.68
	1.0	821.59	637.96	681.92	498.29	438.50	254.87	358.44	171.81

Table 2-4. Watch Circle Radii with 3000 Pounds Net Buoyancy at the Top for Various Intermediate Position Buoyancies and Uniform Currents

CURRENT KNOTS	CABLE DIAMETER INCHES	INTERMEDIATE NET BUOYANCY							
		500 lb		1000 lb		3000 lb		5000 lb	
		TOP BUOY	INT BUOY	TOP BUOY	INT BUOY	TOP BUOY	INT BUOY	TOP BUOY	INT BUOY
.05	.3	.25	.22	.22	.19	.16	.13	.14	.11
	.5	.36	.33	.32	.29	.23	.20	.19	.16
	1.0	.64	.61	.57	.54	.39	.36	.31	.28
.1	.3	.98	.87	.90	.79	.65	.54	.57	.46
	.5	1.43	1.32	1.29	1.18	.91	.80	.76	.65
	1.0	1.94	1.83	2.26	2.15	1.56	1.45	1.25	1.14
.3	.3	7.19	6.08	6.63	5.02	4.88	3.87	4.38	3.37
	.5	10.11	9.10	9.19	8.18	6.59	5.58	5.66	4.65
	1.0	23.06	21.44	19.65	18.03	11.45	9.83	9.46	7.84
.5	.3	22.82	20.01	19.39	16.58	13.57	10.76	12.17	9.36
	.5	39.64	33.6	35.74	29.70	24.00	17.96	18.95	12.91
	1.0	82.68	70.01	74.02	61.35	51.67	39.00	41.42	28.75
1.0	.3	123.91	99.61	113.04	88.78	82.39	58.09	71.16	46.86
	.5	193.05	157.21	174.93	139.09	127.78	91.94	108.29	72.45
	1.0	363.90	298.67	328.86	263.63	241.05	175.82	200.42	135.19

Table 2-5. Watch Circle Radii with 5000 Pounds Net Buoyancy at the Top for Various Intermediate Position Buoyancies and Uniform Currents

| CURRENT KNOTS	CABLE DIAMETER INCHES	INTERMEDIATE NET BUOYANCY							
		500 lb		1000 lb		3000 lb		5000 lb	
		TOP BUOY	INT BUOY	TOP BUOY	INT BUOY	TOP BUOY	INT BUOY	TOP BUOY	INT BUOY
.05	.3	.17	.15	.16	.14	.13	.11	.12	.10
	.5	.24	.22	.23	.21	.18	.16	.16	.14
	1.0	.42	.40	.39	.37	.30	.28	.26	.24
.1	.3	.69	.60	.65	.56	.52	.41	.48	.37
	.5	.97	.86	.91	.82	.72	.63	.64	.55
	1.0	1.68	1.59	1.57	1.48	1.21	1.12	1.03	.94
.3	.3	5.14	4.29	4.93	4.08	4.00	3.15	4.32	3.42
	.5	7.00	6.15	6.63	5.78	5.28	4.43	4.77	3.92
	1.0	11.65	10.80	10.89	10.04	8.48	7.63	7.32	6.47
.5	.3	14.29	11.92	13.69	11.32	11.12	8.75	10.40	8.03
	.5	23.05	20.68	20.89	18.52	14.67	12.3	13.24	10.87
	1.0	50.10	43.37	46.31	39.58	34.88	28.15	29.42	22.69
1.0	.3	79.97	64.60	75.72	60.35	59.80	44.43	54.1	38.73
	.5	124.12	101.57	116.78	94.23	92.62	70.07	81.09	58.54
	1.0	233.10	193.13	218.19	178.22	172.93	132.76	147.24	109.27
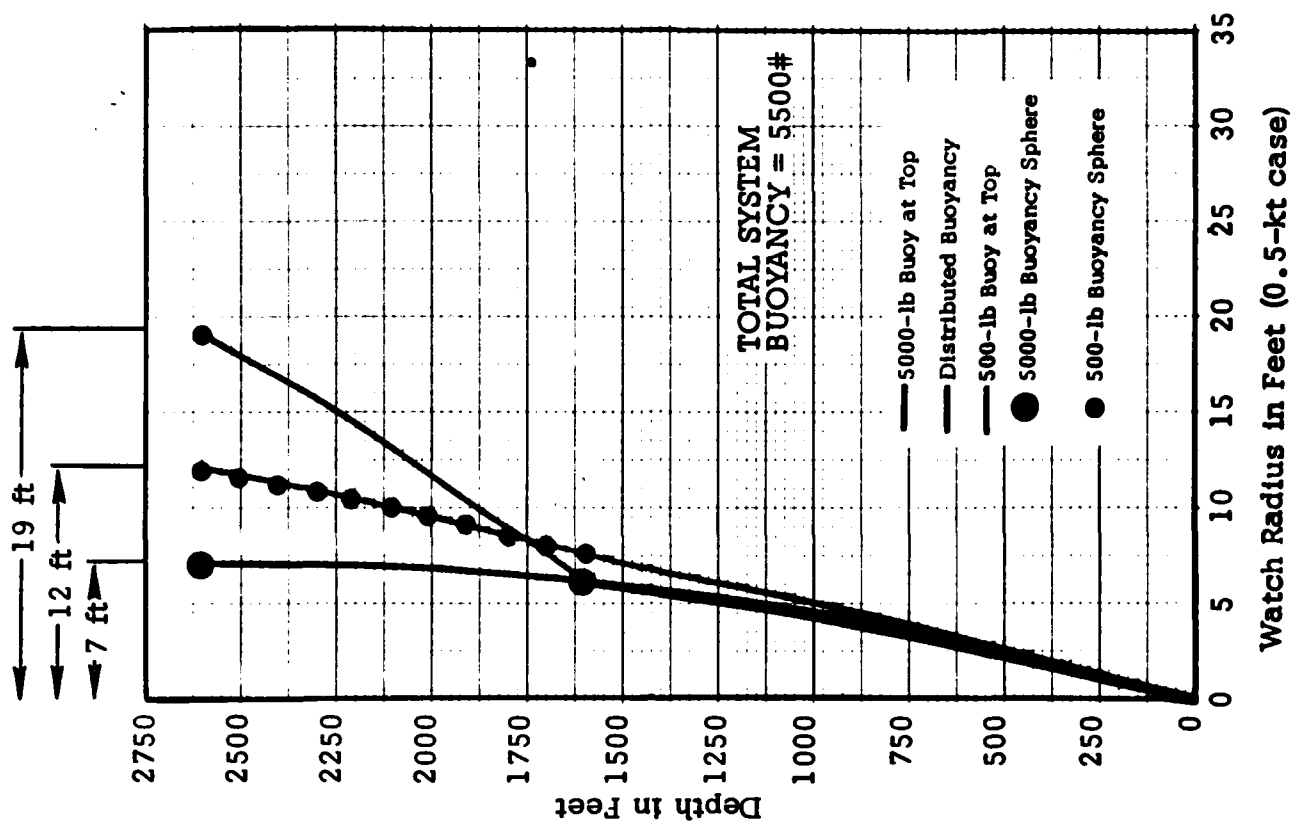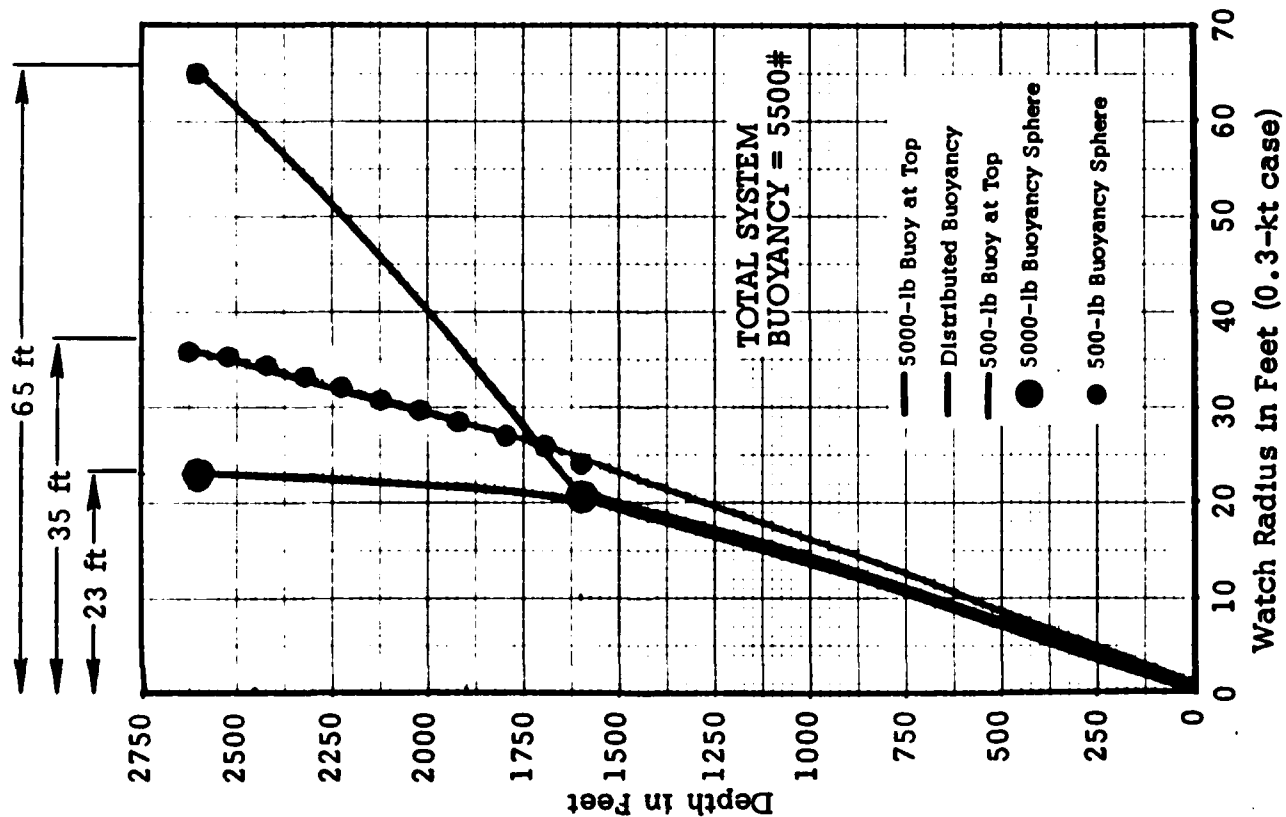
Figure 2-3. Distributed Buoy Watch Circle Comparisons

compared totaled 5500 lb. As observed in the data, the two-buoy system with the larger (5000-lb) buoy at the top results in the better watch circle performance when the configuration is exposed to a uniform current. This result is generally true for uniform currents; however, for sharp current profiles, a distributed buoyancy approach is generally better because the buoys are placed in lower currents and thus result in reduced system drag. When current data from specific sites are known, more meaningful tradeoffs can be made.

Section 3

FAR-FIELD ARRAY ANALYSIS (GOAL POST)

3.1 OVERVIEW

The goal post array, in the analytical sense, represents a system which must be analyzed in an iterative fashion. Figure 3-1 depicts the configuration which has been examined. The intent has been to obtain a technique that can determine the absolute current response of various system components relative to a zero current condition. For the material presented herein the current has been assumed to be uniform and planar; however, the technique can easily be extended to cover currents at various azimuths.

3.2 ANALYSIS APPROACH

The basic steps required to analyze the configuration in Figure 3-1 is as follows:

1. Choose basic system components and determine the zero current equilibrium configuration.

2. Analyze the response of the two vertical strings relative to their connection point on the array. Since the vertical strings have a free end their relative motion will be independent of the movement of the trapezoid. This is strictly true for uniform currents and may or may not be true for current profiles. The latter case is dependent on the vertical response of the trapezoid in that it may position the vertical string in a different current regime.

3. The analysis of (1) will output a tension vector at the trapezoid apex which will be used in the trapezoidal configuration analysis.

4. Analyze the trapezoidal array using Newtons method (described in Appendix B) to determine the static response configuration.
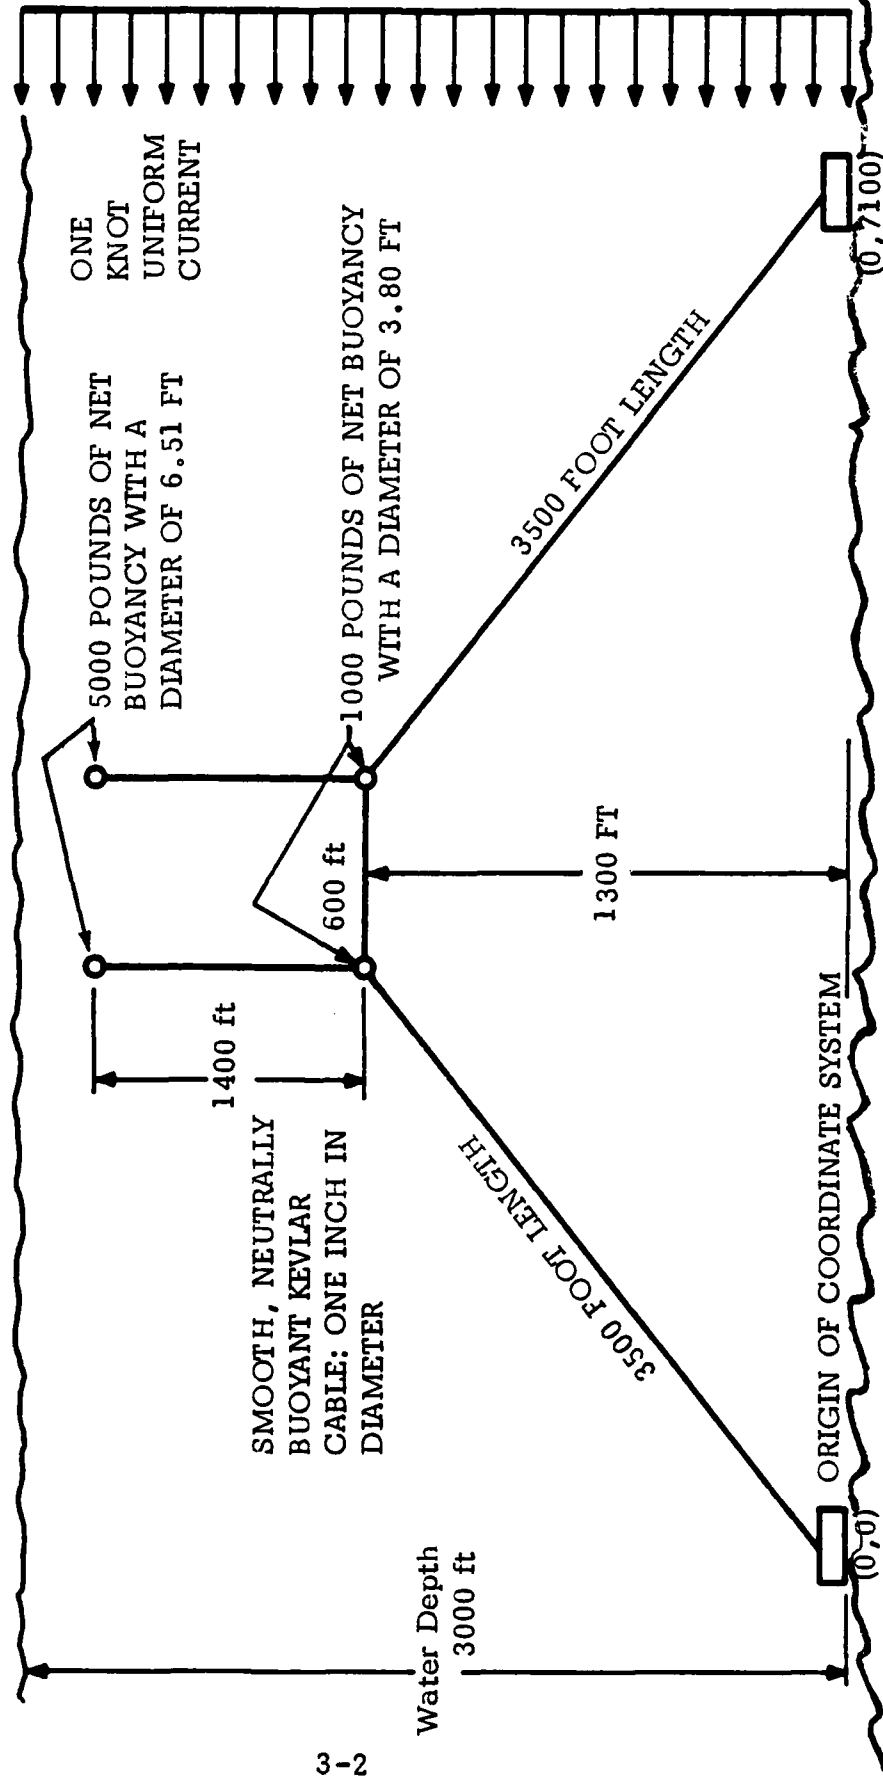
3-1

Figure 3-1. Far-Field Goal Post Array Analysis Diagram

5. Combine the geometry response of the vertical strings and the trapezoid to obtain the overall response of the vertical string top buoy which is to remain as stationary as possible.

The following sections discuss the specifics of each step discussed above.

3.3 BASIC CONFIGURATION

Figure 3-2 depicts the equilibrium diagram for the zero current case that has been assumed for illustrative purposes. The forces and angles result from straightforward calculations. The trapezoidal cables are straight lines since it is assumed that they are neutrally buoyant with no hydrodynamic forces present from currents.

3.4 ANALYSIS OF VERTICAL STRINGS

The vertical strings were analyzed parametrically for various buoys, cable diameters and current velocities. The resultant watch circle data represents a "best case" in total watch circle response, because it assumes the trapezoid to be stationary. Figure 3-3 depicts the parameters assumed for the analysis. The technique is similar to that used on the near field array and discussed in Section 2.

Table 3-1 contains the analytical results in terms of watch circle radius and vertical displacement of the top buoy relative to the connection point at the apex of the trapezoid. Figure 3-4 graphically depicts the same results. Note that the design goal of 3-foot watch circle radius is highlighted and eliminates the majority of configurations examined.

For purposes of the goal post array system analysis the solution using a 5000 lb. buoy and a 1.0 inch diameter Kevlar cable in a 1-knot current was used. From the analysis of this case the vertical string tension at the trapezoid was 5997.42 lbs. tension at an angle of 95.33° degrees.

3-3
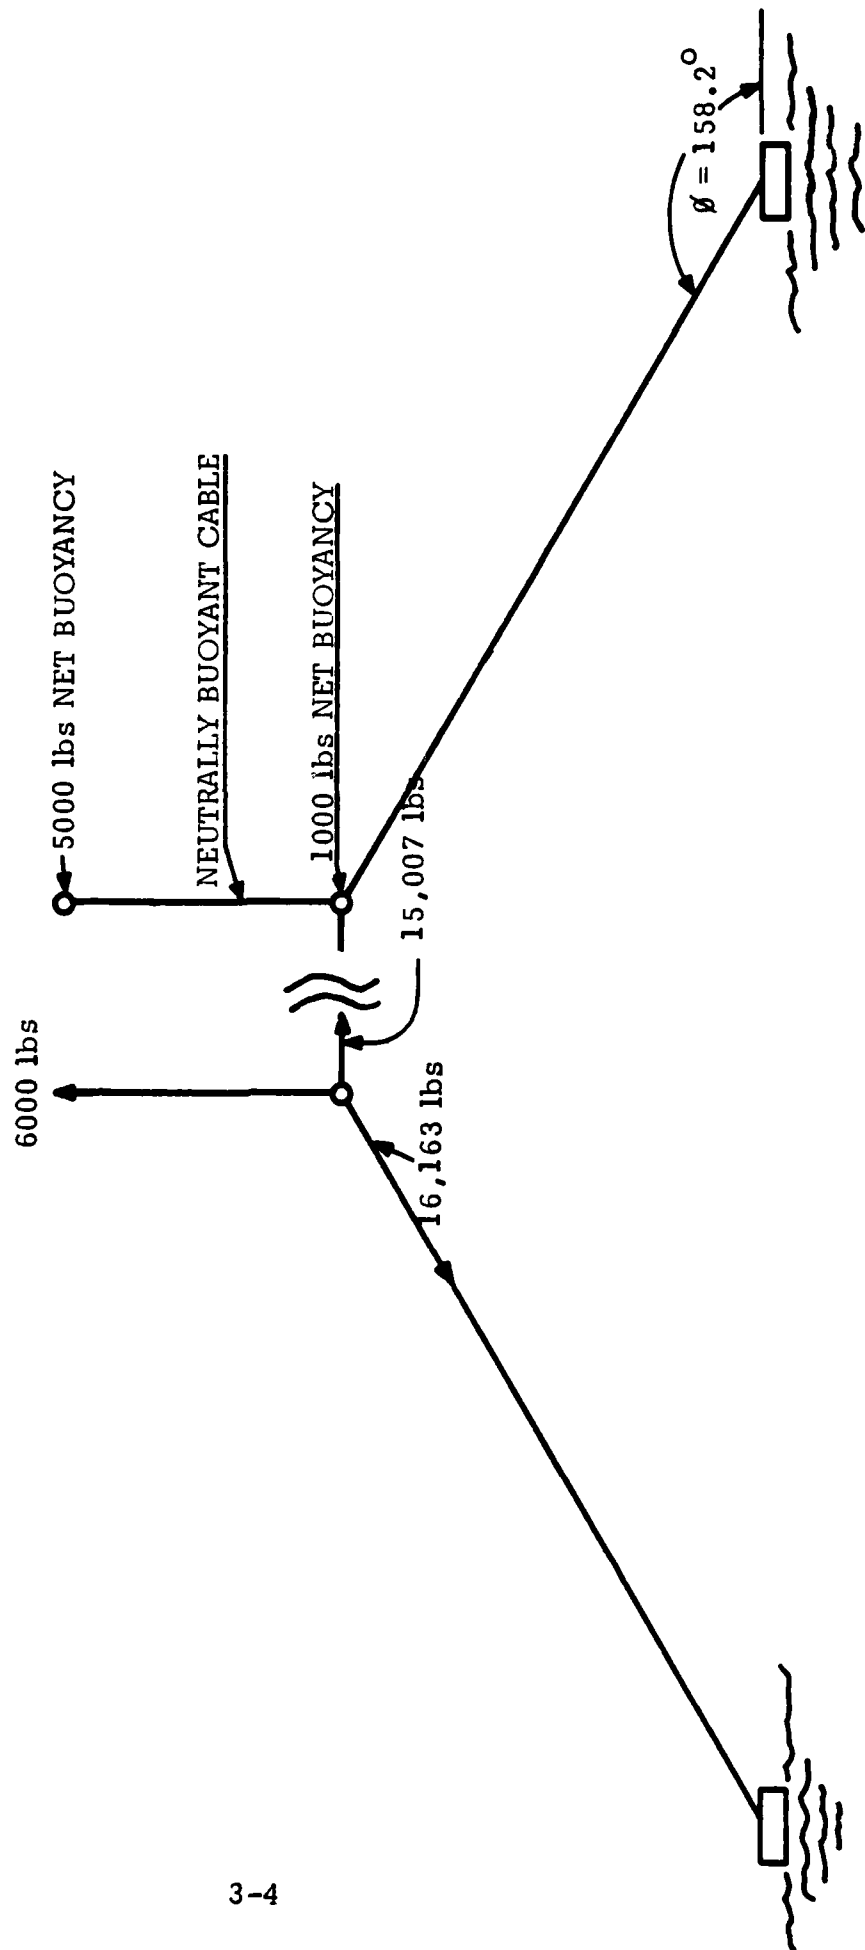
Figure 3-2. Equilibrium Diagram for the Trapezoidal Array
With Zero Current

5000 lbs NET BUOYANCY

NEUTRALLY BUOYANT CABLE

1000 lbs NET BUOYANCY

15,007 lbs

6000 lbs

16,163 lbs

$\emptyset = 158.2^{\circ}$

Figure 3-3. Vertical Strings Analysis Diagram

PRELIMINARY WATCH CIRCLE TRADE-OFFS
OF VERTICAL SENSOR STRINGS

Figure 3-4. Preliminary Watch Circle Trade-offs of Vertical Sensor Strings

3-6

Table 3-1. Geometric Response for Vertical Strings for Various Combinations of Buoyancy, Cable Diameter, and Uniform Current

.05 KNOT CURRENT

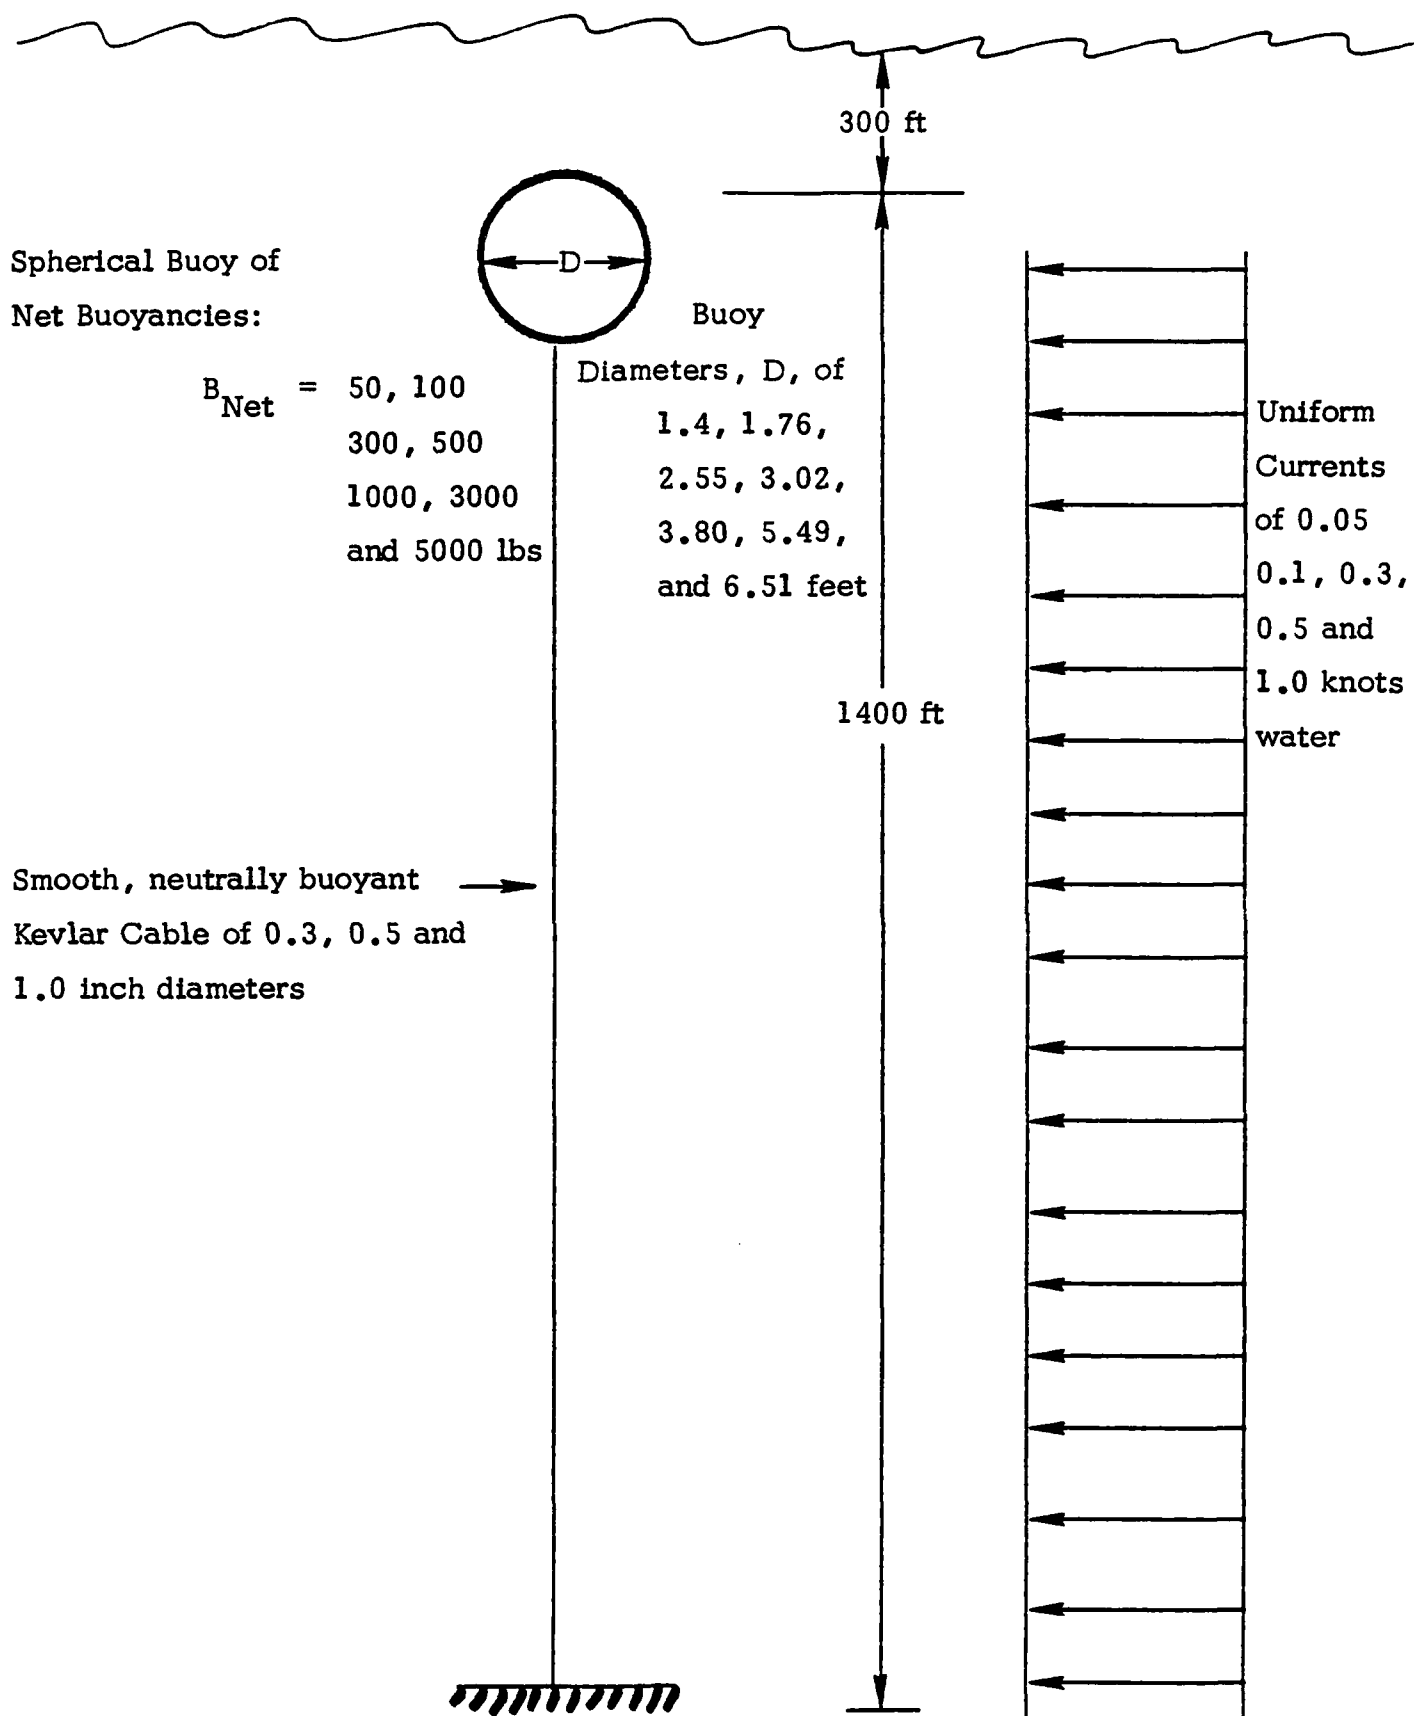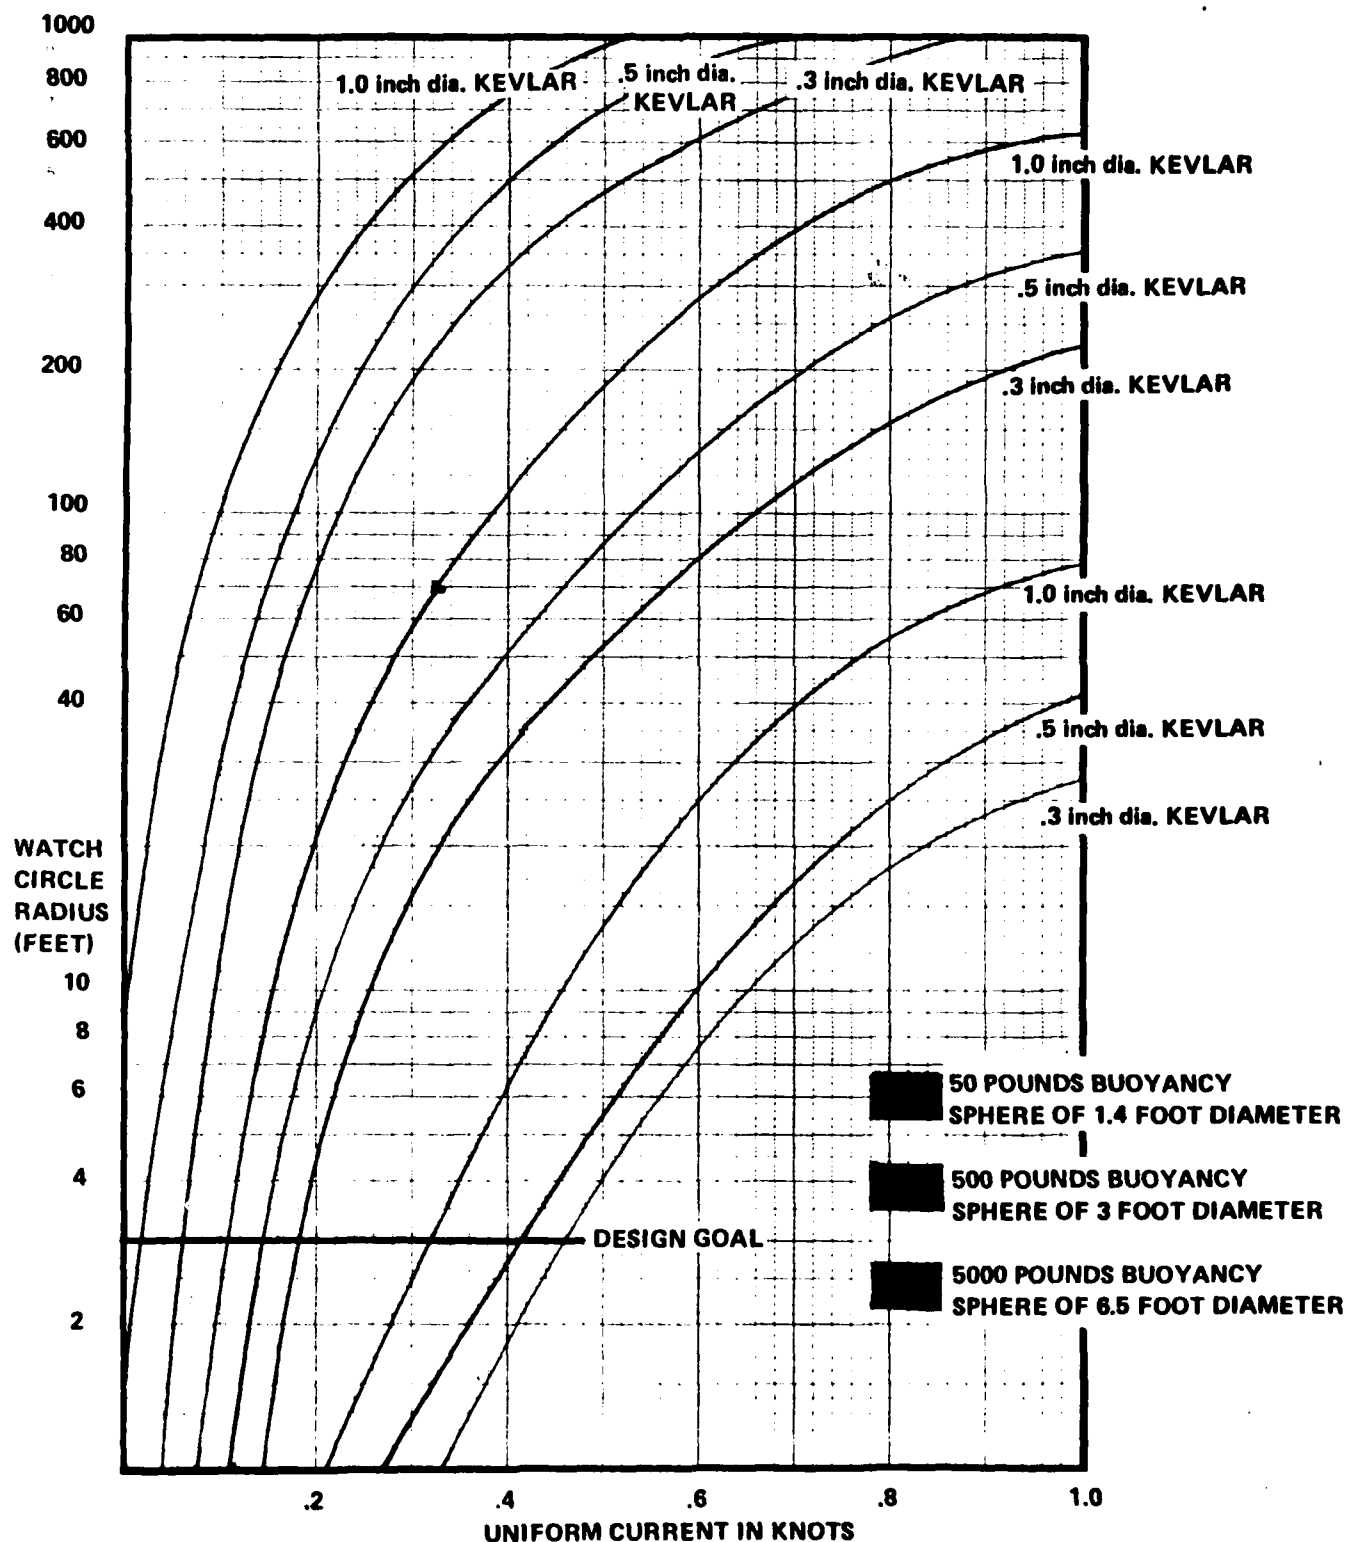| Net Buoyancy (Pounds)	Cable Diameter (Inches)	Displacement In X Watch Radius	Displacement In Y Dip
50	.3	0.17	0.00
	.5	2.90	0.01
	1.0	11.27	0.08
100	.3	0.13	0.00
	.5	0.13	0.00
	1.0	2.86	0.01
300	.3	0.44	0.00
	.5	0.09	0.00
	1.0	0.09	0.00
500	.3	0.28	0.00
	.5	0.43	0.00
	1.0	0.07	0.00
1000	.3	0.16	0.00
	.5	0.23	0.00
	1.0	0.41	0.00
3000	.3	0.09	0.00
	.5	0.10	0.00
	1.0	0.16	0.00

0.10 KNOT CURRENT

Net Buoyancy (Pounds)	Cable Diameter (Inches)	Displacement In X Watch Radius	Displacement In Y Dip
50	.3	14.54	0.12
	.5	28.44	0.43
	1.0	63.13	1.99
100	.3	5.10	0.02
	.5	11.59	0.09
	1.0	28.32	0.43
300	.3	0.34	0.00
	.5	0.34	0.00
	1.0	5.89	0.03
500	.3	0.29	0.00
	.5	0.29	0.00
	1.0	0.29	0.00
1000	.3	0.23	0.00
	.5	0.23	0.00
	1.0	0.23	0.00
3000	.3	0.30	0.00
	.5	0.39	0.00
	1.0	0.16	0.00

Table 3-1. Geometric Response for Vertical Strings for Various Combinations of Buoyancy, Cable Diameter, and Uniform Current (cont.)

Net Buoyancy (Pounds)	Cable Diameter (Inches)	0.3 KNOT CURRENT		0.5 KNOT CURRENT	
		Displacement In X Watch Radius	Displacement In Y Dip	Displacement In X Watch Radius	Displacement In Y Dip
50	.3	183.69	16.20	475.47	109.73
	.5	299.30	43.25	682.91	233.53
	1.0	539.43	143.71	958.24	490.69
100	.3	91.05	4.01	258.45	31.77
	.5	152.33	11.17	406.99	79.98
	1.0	298.23	43.02	680.90	232.55
300	.3	27.74	0.39	88.25	3.68
	.5	48.41	1.16	145.15	10.01
	1.0	100.01	4.86	281.38	37.99
500	.3	14.92	0.12	52.48	1.31
	.5	27.26	0.38	86.93	3.60
	1.0	58.15	1.67	191.90	14.12
1000	.3	5.60	0.02	56.65	1.47
	.5	11.26	0.08	91.09	3.86
	1.0	26.73	0.37	175.98	14.63
3000	.3	1.41	0.00	6.65	0.03
	.5	1.42	0.00	11.64	0.07
	1.0	6.02	0.00	26.11	0.34
5000	.3	1.19	0.00	3.31	0.00
	.5	1.19	0.00	6.04	0.02
	1.0	1.20	0.00	14.41	0.11

Table 3-1. Geometric Response for Vertical Strings for Various Combinations of Buoyancy, Cable Diameter, and Uniform Current (cont.)

1.0 KNOT CURRENT

Net Buoyancy (Pounds)	Cable Diameter (Inches)	Displacement In X Watch Radius	Displacement In Y Dip
50	.3	1032.75	575.45
	.5	1165.32	781.01
	1.0	1278.33	1013.63
100	.3	777.65	303.36
	.5	970.22	499.01
	1.0	1162.96	799.03
300	.3	354.94	58.76
	.5	530.37	135.42
	1.0	812.77	336.83
500	.3	225.60	23.30
	.5	350.20	57.56
	1.0	599.06	175.59
1000	.3	241.55	25.97
	.5	365.02	61.27
	1.0	610.70	180.65
3000	.3	43.50	0.81
	.5	66.71	1.99
	1.0	123.95	7.08
5000	.3	27.15	.31
	.5	41.05	.74
	1.0	75.69	2.62

3.5   DETERMINE RESULTANT FORCE ON TRAPEZOID

In addition to the vertical string tension vector it was assumed
that a 1000 lb. buoy was located at each trapezoid apex. Figure 3-5 depicts
the vector force diagram that computes the resultant force acting on the
trapezoid.

3.6   ANALYSIS OF THE TRAPEZOID

The application of Newton's method in calculating the catenary of
the goal post configuration current response consists of utilizing the known
zero current geometry of the goal post array and utilizing the catenary
computer program to successively calculate trial solutions. The process is
started by (1) assuming a new tension vector at the base of the trapezoid;
(2) assuming a perturbed set of tension vectors about that chosen in (1);
(3) calculating the resultant catenary of the trapezoid; (4) comparing the
catenary results to the compatibility equations; (5) predicting the next
initial condition from the error derivatives; and (6) computing the system
watch circles. The following example illustrates this procedure whose
theoretical approach is detailed in appendix B.

3.6.1   Assume a New Tension Vector

Figure 3-6 depicts an intuitive response geometry to the trapezoid
from an imposed current. The tension will increase and the angle will increase
at Point A. Therefore, an assumed solution is:

$$T_1 = 16,200 \text{ lbs} \quad (T_0 \text{ was } 16,163.57)$$

$$\emptyset_1 = 159.0 \text{ degrees} \quad (\emptyset_0 \text{ was } 158.19)$$

3.6.2   Assume a Perturbed Set of Initial Conditions

The purpose of this is to find the effect of small perturbations of the
assumed solution on the compatibility relationships in order to form error
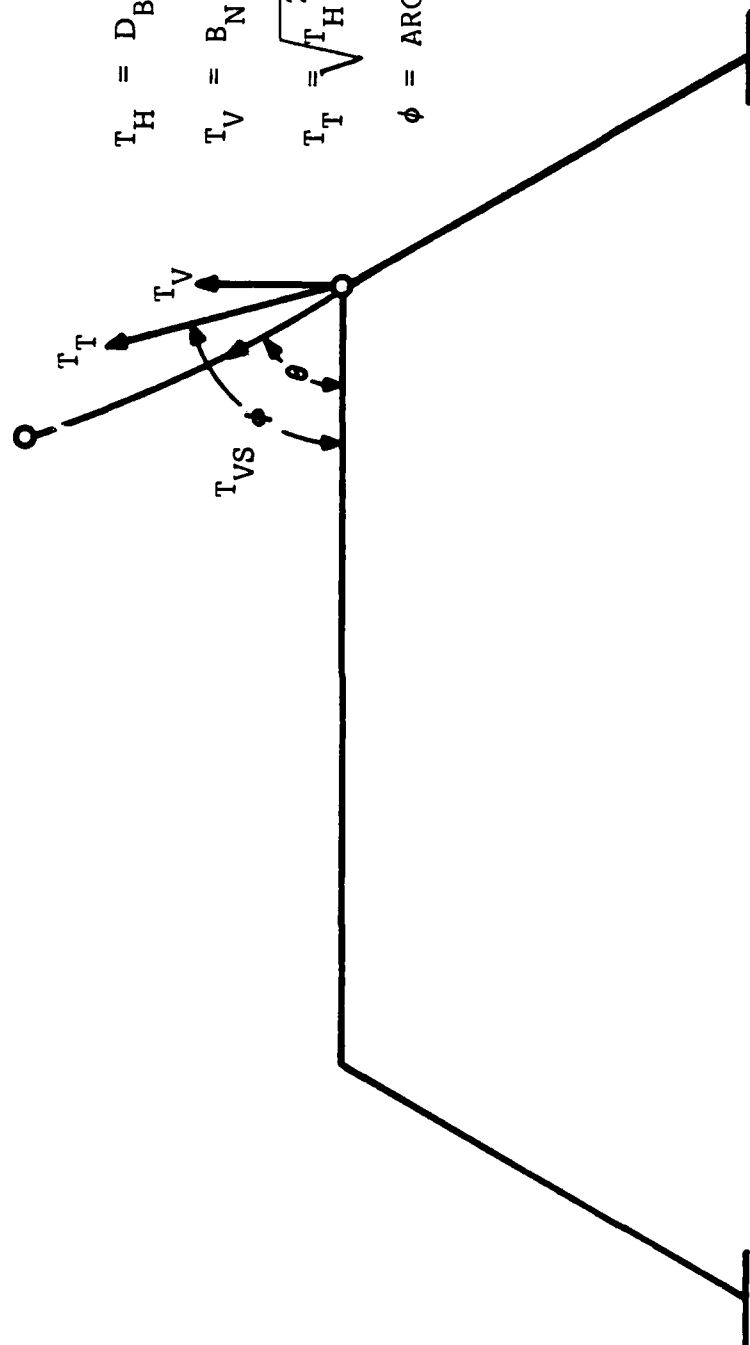derivatives.

3-10

$$T_H = D_B + T_{VS} \cos \theta$$

$$T_V = B_N + T_{VS} \sin \theta$$

$$T_T = \sqrt{T_H^2 + T_{VS}^2}$$

$$\phi = \text{ARCTAN } T_V/T_H$$

Figure 3-5. Vector Force Diagram For Determining Resultant Force on Trapezoid Apex.
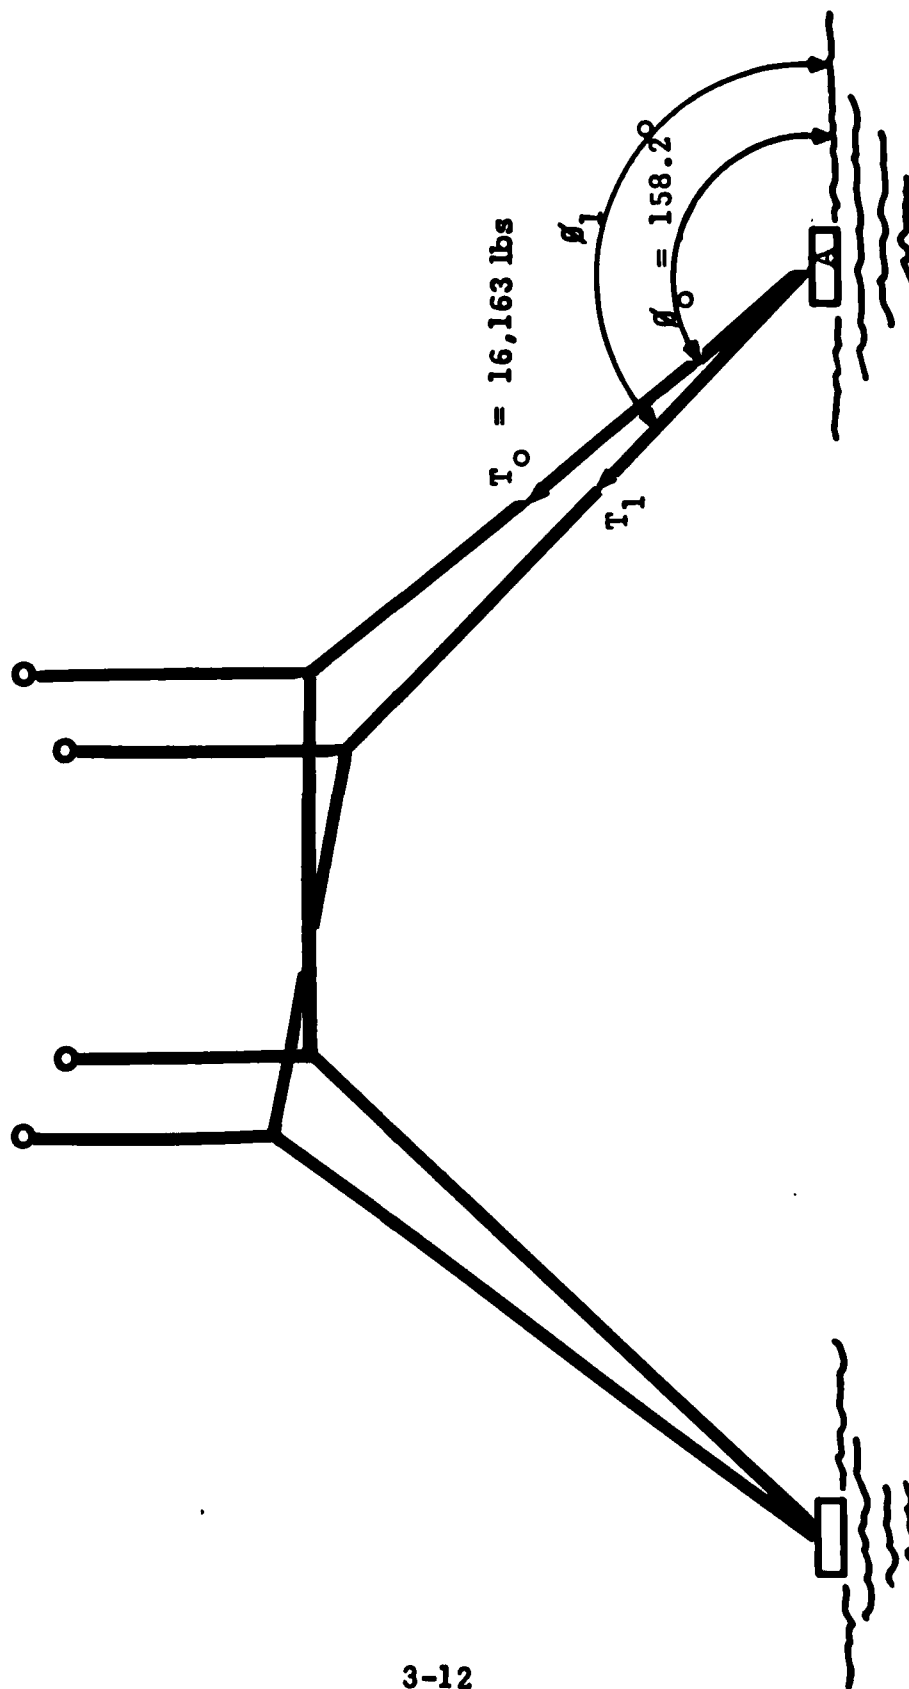
ZERO CURRENT CONDITION

INTUITIVE RESPONSE TO CURRENT

T_o = 16,163 lbs

T_1

ϕ_1

ϕ_o = 158.2

Figure 3-6. Intuitive Response Geometry to a Planar Current for the Goal Post Array

For purposes of this example the two sets are:

$$T_1 + \Delta T = 16,200 + 5 = 16,205 \text{ lbs}$$
$$\phi_1 = \phi_1 = 159 \text{ degrees}$$

$$T_1 = T_1 = 16,200 \text{ lbs}$$
$$\phi_1 + \Delta\phi = 159 + (0.1) = 159.1 \text{ degrees}$$

3.6.3 Calculate the Resultant Catenary of the Trapezoid

Using the three sets of initial conditions:

$$T_1, \phi_1,$$
$$T_1 + \Delta T, \phi_1$$
$$T, \phi_1 + \Delta\phi$$

The resultant geometry of the end of the trapezoid relative to the known coordinates of the end point (0,0) are: (See Figure 3-7)

Initial Condition	f	g
$T_1 = 16,200$ lbs $\phi_1 = 159^\circ$	23.24	-137.78
$T_1 = 16,205$ lbs $\phi_1 = 159^\circ$	22.90	-136.95
$T_1 = 16,200$ lbs $\phi_1 = 159.1^\circ$	22.94	-149.29

3.6.4 Compute Errors from the Compatibility Relationships

From the known relative geometry of the anchor points of the trapezoid the following conditions must hold (refer to Figure 3-7):

$$f = X = 0$$
$$g = y = 0$$

3-13

Figure 3-7. Trapezoidal Array Nomenclature

For the cases above the error derivatives are: (see Appendix B for derivatives)

$$\frac{\partial f}{\partial T} = \frac{22.90 - 23.24}{16,205 - 16,200} = -0.068$$

$$\frac{\partial f}{\partial \emptyset} = \frac{22.94 - 23.24}{159.1 - 159} = -3.00$$

$$\frac{\partial g}{\partial T} = \frac{-136.95 - (-137.78)}{16,205 - 16,200} = 0.166$$

$$\frac{\partial g}{\partial \emptyset} = \frac{-149.29 - (-137.78)}{159.1 - 159} = -115.10$$

3.6.5 <u>Predict the Next Initial Condition for T and $\emptyset$ in Order for f = g = 0</u>

The next set of conditions are:

$$T_2 = T_1 + dT$$

$$\emptyset_2 = \emptyset_1 + d\emptyset$$

where $T_1 = 16,200$ lbs $\emptyset_1 = 159^\circ$

$$dT = -\left[\frac{f\,\frac{\partial g}{\partial \emptyset} - g\,\frac{\partial f}{\partial \emptyset}}{\frac{\partial f}{\partial T}\,\frac{\partial g}{\partial \emptyset} - \frac{\partial g}{\partial T}\,\frac{\partial f}{\partial \emptyset}}\right] \text{ and}$$

$$d\emptyset = -\left[\frac{\frac{\partial f}{\partial T}\,g - f\,\frac{\partial g}{\partial T}}{\frac{\partial f}{\partial T}\,\frac{\partial g}{\partial \emptyset} - \frac{\partial g}{\partial T}\,\frac{\partial f}{\partial \emptyset}}\right]$$

Using the numbers calculated in section 3.6.4 the new assumptions for T and $\emptyset$ are:

$$T_2 = 16,200 - \left[\frac{(23.24)\ (-115.10) - (-137.78)\ (-3.00)}{(-0.068)\ (-115.10) - (0.166)\ (-3.00)}\right]$$

$$= 16,200 + 370.97 = 16,570.97$$

$$\emptyset_2 = 159 + \frac{(-137.78)\ (-0.068) - (23.24)\ (0.166)}{(-0.068)\ (-115.1) - (0.166)\ (-3.00)}$$

$$= 159 - 0.66 = 158.34$$

A new set of perturbed conditions about T_2, $\emptyset_2$ were computed and the process continued. After a total of three iterations, the following results were obtained for a 1 knot uniform current:

Scope (ft)	X (ft)	Y (ft)	Tension (lb)	$\emptyset$ (degrees)
0	7100.00	0	16,597.46	158.38
3500	3847.55	1292.85	16,561.21	157.74
3500	3847.55	1292.85	14,772.90	178.85
4100	3247.67	1304.90	14,770.65	178.85
4100	3247.67	1304.90	15,303.77	158.21
7600	0.06	-0.02	15,267.23	157.51

The above data can be compared to the zero current case presented below:

Scope (ft)	X (ft)	Y (ft)	Tension (lbs)	$\emptyset$ (degrees)
0	7100.00	0	16163.6	158.19
3500	3850.00	1300.00	16163.6	158.19
3500	3850.00	1300.00	15006.6	180.00
4100	3250.00	1300.00	15006.6	180.00
4100	3250.00	1300.00	16163.6	158.19
7600	0	0	16163.6	158.19

3.6.6 Compute the System Watch Circles

The resultant watch circle of the various parts of the goal post array system are computed below:

- Displacement of Buoy "A" in a 1 knot current relative to a zero current condition:

    x displacement: 3847.55 - 3850 = -2.45 ft

    y displacement: 1292.85 - 1300 = -7.15 ft

3-16

- Displacement of Buoy "B" in a 1 knot current relative to a zero current condition:

  x displacement: 3247.67 − 3250 = −2.33 ft

  y displacement: 1304.90 − 1300 = 4.90 ft

- Displacement of Vertical string buoy "C" relative to buoy "A" and buoy "D" relative to buoy "B":

  x displacement = 75.69 ft $\Big\}$ From Table 3-1

  y displacement = −2.62 ft

- Total displacement of buoy "C":

  x displacement ≈ −75.69 − 2.45 = −78.14

  y displacement ≈ − 2.62 − 7.15 = −9.77 (dip)

- Total displacement of buoy "D":

  x displacement = −75.69 − 2.33 = −78.02

  y displacement = −2.62 + 4.90 = 2.28 (rise)

3.7 OBSERVATIONS OF FAR-FIELD GOAL POST ANALYSIS

The analysis presented in the preceding sections have demonstrated a method of assessing the array response to the environmental effects of current. It is apparent from the analysis of the vertical strings (Figure 3-4) that watch circles in the order of 3 ft. can only be maintained under very low current conditions (.4 knots or less depending on buoyancy and size of cable). The analysis model presented herein has been intended to demonstrate an approach for estimating array response to ocean currents. Definition of system components and in-situ current profiles are needed to provide more accurate results; however, the model should be used in a parametric sense to assist in arriving at a final design. Finally the model can be easily extended to examine non-planar currents for a total excursion analysis capability.

Appendix A

CALCULATIONS
OF SPHERICAL BUOY
PARAMETERS

The buoyant member was assumed to be a spherical buoy made of 6061-T6 aluminum with a 3000 foot working depth and a design safety factor of 3.

Computations were made to determine the wall thickness versus the inner and outer radius of the spherical buoy. An incremental element of stress was defined as

$$\sigma = q R_2 / 2 t$$

where q = the external pressure

R_2 = the inner wall radius of the buoy

t = the buoy wall thickness

and   q = ρ g h

$$= \frac{(1.99 \text{ slug/foot}^3)\ (32.2 \text{ ft/sec}^2)\ (3000 \text{ feet})}{144 \text{ inch}^2/\text{foot}^2}$$

$$= 1335 \text{ p.s.i.}$$

The maximum allowable stress is given by

$$\sigma \text{ max} = \frac{\text{Compressive Yield Strength of Material}}{\text{Safety Factor}}$$

For 6061-T6 aluminum the compressive yield strength is 35,000 psi. Therefore

$$\sigma \max = \frac{35000}{3} = 11667 \text{ psi}$$

Thus

$$\sigma \max = q R_2 / 2 t$$

$$R_2/t = 2(11667)/1135 = 17.5$$

Since

$$R_2 = R - t/2$$

where R = the outer radius of the buoy

Then

$$\frac{R - t/2}{t} = 17.5$$

$$R = 17.5 t + t/2$$

$$R/t = 18$$

Calculations were then made of the net buoyancy versus radius. Since the net buoyancy,

$$B_{net} = B_{gross} - \text{Weight of the buoy}$$

Then

$$B_{net} = \tfrac{4}{3} \pi R^3 \gamma_{water} - \left[\tfrac{4}{3} \pi R^3 \gamma_{al} - \tfrac{4}{3} \pi (R-t^3) \gamma_{al} \right]$$

$$= \tfrac{4}{3} \pi \left[R^3 (\gamma_{water} - \gamma_{al}) - (R-t)^3 \gamma_{al} \right]$$

Since $R/t = 18$

$$B_{net} = \tfrac{4}{3} \pi \left[R^3 (\gamma_{water} - \gamma_{al}) - (R - R/18)^3 \gamma_{al} \right]$$

$$= \tfrac{4}{3} \pi \left[R^3 (\gamma_{water} - \gamma_{al}) - 1.176 R^3 \gamma_{al} \right]$$

$$= \tfrac{4}{3} \pi R^3 (\gamma_{water} - 0.1761 \gamma_{al})$$

Since $\gamma_{water} = 64.4 \text{ lb/ft}^3$

$\gamma_{al} = 169.3 \text{ lb/ft}^3$

$$B_{net} = 144.8 R^3$$

where R is in feet

A-2

Subsequently Table A-1 presents the buoyancies examined versus the outside diameter of the aluminum spheres required to produce such buoyancy.

Table A-1 Net Buoyancy and Buoy Diameter

B(net) (lbs)	Diameter (feet)
50	1.40
100	1.76
300	2.55
500	3.02
1000	3.80
3000	5.49
5000	6.51

The semifixed array was evaluated in uniform currents of 0.05, 0.1, 0.3, 0.5, and 1.0 Knots. Consequently the drag, D, caused by the buoy was computed by

$$D = C_D A \ (1/2 \rho V^2)$$

where C_D = drag coefficient

$$= .5 \text{ for } 10^3 < Re < 3 \times 10^5$$

A = spherical area

$$= \pi D^2/4$$

ρ = Density of Water

$$= 1.99 \text{ slugs}$$

V^2 = Velocity in $\text{Knots}^2 \left(1.689 \ \frac{ft/sec}{kt}\right)^2$

Table A-2
Spherical Buoy Drag, lbs

Net Buoyancy	Current Velocity, Kts.				
lbs.	0.05	0.1	0.3	0.5	1.0
50	.006	.022	.197	.546	2.18
100	.009	.035	.311	.863	3.45
300	.018	.073	.652	1.812	7.25
500	.025	.102	.916	2.545	10.18
1000	.040	.162	1.455	4.041	16.16
3000	.084	.336	3.036	8.405	33.62
5000	.118	.473	4.254	11.82	47.27

Appendix B

APPLICATION OF NEWTON'S METHOD
IN CALCULATING THE EQUILIBRUM
CONFIGURATION OF A TWO-LEGGED
BUOY MOORING WITH AN IN PLANE CURRENT

Newton's method is basically a numerical iterative means for finding a zero of a function $f(x)$. This method can be extended to mathematical systems of n equations in n unknowns.

For application to the trapezoided array reference is made to Figure B-1. In order to calculate an assumed configuration due to a current a new tension vector at point $(X_T, 0)$ is assumed and the resultant location of the end point (f, g) determines how accurate your initial assumption was. In order for your assumption to be correct:

$$f = g = 0 \quad \text{(B-1)}$$

The total differential of f and g can be expressed as:

$$df = \frac{\partial f}{\partial T} dT + \frac{\partial f}{\partial \theta} d\theta = f_2^{\,\circ} - f_1 \quad \text{(B-2)}$$

$$dg = \frac{\partial g}{\partial T} dT + \frac{\partial g}{\partial \theta} d\theta = g_2^{\,\circ} - g_1 \quad \text{(B-3)}$$

In order for f_2 and g_2 to be equal to zero, the following expression in matrix form must hold:

$$
\begin{bmatrix}
\dfrac{\partial f}{\partial T} & \dfrac{\partial f}{\partial \theta} \\[2ex]
\dfrac{\partial g}{\partial T} & \dfrac{\partial g}{\partial \theta}
\end{bmatrix}
\begin{bmatrix}
dT \\[2ex]
d\theta
\end{bmatrix}
=
\begin{bmatrix}
-f_1 \\[2ex]
-g_1
\end{bmatrix}
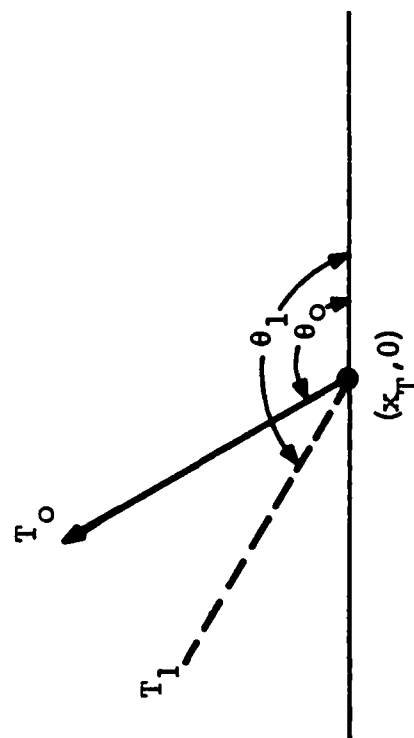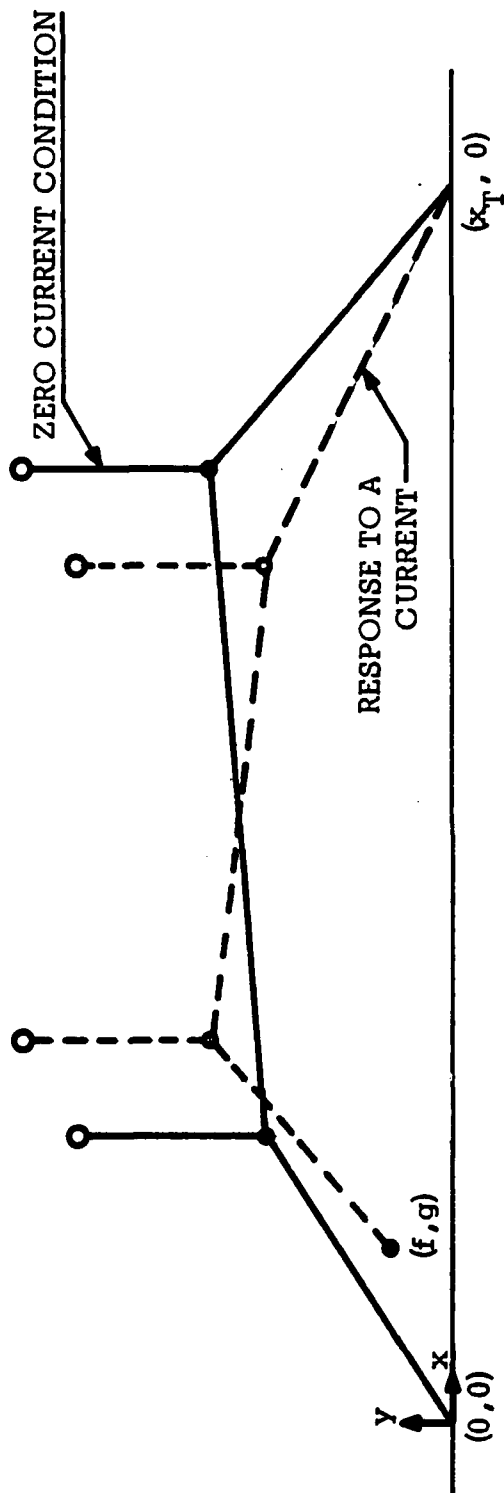\quad \text{(B-4)}
$$

or,

B-1

Figure B-1. Trapezoidal Array Nomenclature

$$d\theta = -\left[\frac{\frac{\partial f}{\partial T}\, g\, -\, f\, \frac{\partial g}{\partial T}}{\frac{\partial f}{\partial T}\frac{\partial g}{\partial \theta}\, -\, \frac{\partial f}{\partial \theta}\frac{\partial g}{\partial T}}\right] \qquad (B-5)$$

$$dT = -\left[\frac{f\,\frac{\partial g}{\partial \theta}\, -\, g\,\frac{\partial f}{\partial \theta}}{\frac{\partial f}{\partial T}\frac{\partial g}{\partial \theta}\, -\, \frac{\partial f}{\partial \theta}\frac{\partial g}{\partial T}}\right] \qquad (B-6)$$

Therefore the next choice for T_2 and θ_2 in order to make $f_2 = g_2 = 0$ are:

$$T_2 = T_1 + dT \qquad (B-7)$$

$$\theta_2 = \theta_1 + d\theta \qquad (B-6)$$

where dT and $d\theta$ are defined in equations B-6 and B-5 respectfully.

The error derivatives $\frac{\partial f}{\partial T}$, $\frac{\partial g}{\partial T}$, $\frac{\partial f}{\partial \theta}$, and $\frac{\partial g}{\partial \theta}$ are evaluated by obtaining

values of f and g for very small variations of the initial assumption T_1, θ_1,

that is:

$$\frac{\partial f}{\partial g} = \frac{f_{(T_1 + \Delta T),\ \theta_1} - f_{(T_1,\ \theta_1)}}{\Delta T} \qquad (B-7)$$

$$\frac{\partial g}{\partial T} = \frac{g_{(T_1 + \Delta T,\ \theta_1)} - g_{(T_1,\ \theta_1)}}{\Delta T} \qquad (B-8)$$

$$\frac{\partial f}{\partial \theta} = \frac{f_{(T_1,\ \theta_1 + \Delta\theta)} - f_{(T_1,\ \theta_1)}}{\Delta \theta} \qquad (B-9)$$

$$\frac{\partial g}{\partial \theta} = \frac{g_{(T_1,\ \theta_1 + \Delta\theta)} - g_{(T_1,\ \theta_1)}}{\Delta \theta} \qquad (B-10)$$

The solution will converge quadratically and as in the example presented

in Section 3, takes about 4 iterations in order to obtain $f = g \approx 0$.

END
DTIC
4-86